

Oil Anti Smoke (OAS)

Oil Anti Smoke

Product properties

Innovative mixture of products which significantly reduces exhaust smoke and soot generation for all 4-stroke-, LPG and diesel powered engines. Ideal for vehicles with high consumption of oil. The product ensures optimal lubrication of all moving parts and reduces the oxidation of the engine oil. Due to this, the engine noise will be lower, smoke is extremely reduced, the wear decreases and the lifetime of the unit is increased. The high viscosity prevents oil from entering the combustion chamber.

Area of application

For use in all 4-stroke, diesel and LPG powered engines. This product is compatible with all commercially available oils.

Application

Add to oil system. We recommend an oil system cleaning with Engine Flush before using this product. Total Oil volume according to manufacturer specifications must be observed.

Consumption

375ml sufficient for 5 liter of oil. Mixing ratio: 1:15

Reaction time

while engine is running

Technical data

Physical state: viscous

Colour: brown


Odour: mild

Flashpoint: > 100 °C

Density at 68 °F: 0.89 - 0.92 g/cm³

Water resistant

Available size	Item no.	PU
375ml	P2111	28
5L	P2112	4
10L	P2118	1
20L	P2113	1
200L	P2115	1

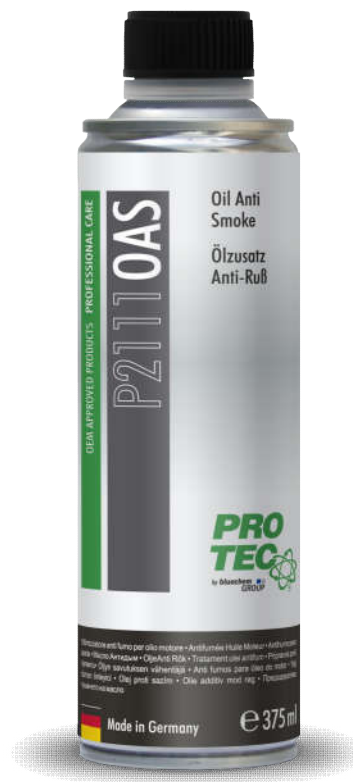

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advice. No liability for printing errors, technical modifications and errors excepted.



Made in Germany

CTP GmbH
Saalfelder Straße 35 h

07338 Leutenberg
Germany

Tel.: +49 (0)36734 230-0
Fax: +49 (0)36734 230-22

www.bluechemgroup.com
www.ctp.de

28.09.2016