

## Diesel Anti Smoke

### Product properties

Significantly reduces exhaust smoke and unpleasant "rattling" noises of all stationary and mobile diesel engines. Raises the cetane number of diesel fuels. The product ensures optimal lubrication of all moving parts within the diesel system and therefore provides a clean and powerful combustion with minimal smoking and soot build-up. Protects the complete system against corrosion.

### Area of application

Suitable for all diesel powered engines.

### Application

Add to the diesel system before filling up.

### Consumption

150 ml for 50 ltr. diesel

### Reaction time

Works during operation

### Technical data

Physical state: liquid

Colour: yellow

Odour: characteristic

Initial boiling point and boiling range: 200 - 210 °C

Flashpoint: > 65 °C

Lower explosion limit: > 0,6 Vol.-%


Upper explosion limit: > 7,0 Vol.-%

Ignition temperature: > 200 °C

Density at 68 °F: 0,810 - 0,825 g/cm<sup>3</sup>

Water resistant

Available size	Item no.	PU
150ml	43231	24

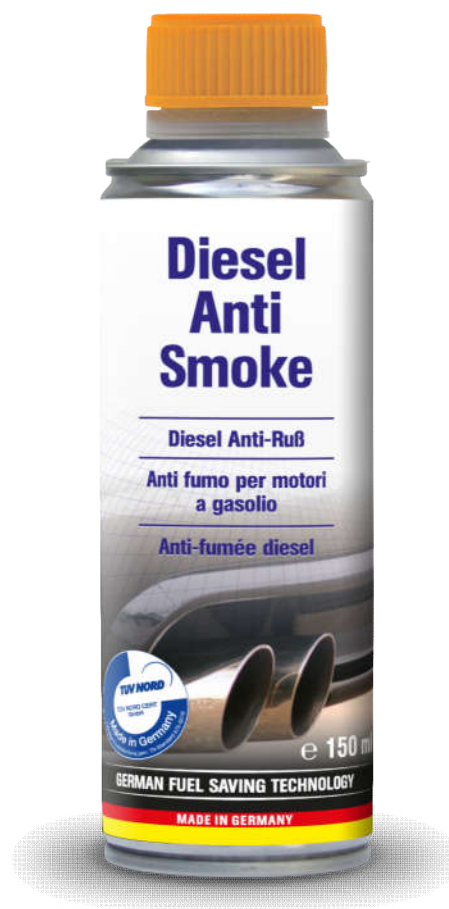

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advice. No liability for printing errors, technical modifications and errors excepted.



Made in Germany

CTP GmbH  
Saalfelder Straße 35 h

07338 Leutenberg  
Germany

Tel.: +49 (0)36734 230-0  
Fax: +49 (0)36734 230-22

www.bluechemgroup.com  
www.ctp.de

13.03.2017