

Ceramic Chain Wax (CCW)

Ceramic Chain Wax

Product properties

Fully synthetic, highly adhesive lubricant for all motorcycle chains, especially for O, X, Z- and W-Ring chains. It provides an extremely high pressure resistant lubrication film, reduces friction and wear, is water resistant, heat resistant and centrifugal forces.

Area of application

On all motorbike chains

Application

Shake well before use. Spray carefully on the cleaned chain at intervals of approx. 10-15 cm until all chain links are completely covered with the product.

ATTENTION:

Do not strain the chain after application for about 30 minutes.

Consumption

Depending on the application

Reaction time

approx. 30 min

Technical data

Physical state: aerosol

Colour: yellow

Odour: characteristic


Ignition temperature: > 200 °C

Density at 68 °F: 0,704 g/cm³

Water resistant

Solvent content: 53,9 %

Available size	Item no.	PU
500ml	P3082	24

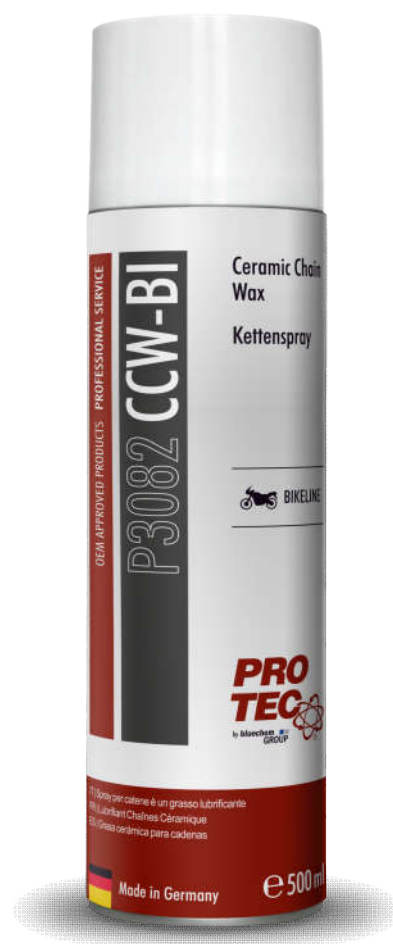

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany

CTP GmbH
Saalfelder Straße 35 h

07338 Leutenberg
Germany

Tel.: +49 (0)36734 230-0
Fax: +49 (0)36734 230-22

www.bluechemgroup.com
www.ctp.de

11.05.2017