

Electronic Spray (ELS)

Electronic Spray

Product properties

PRO-TEC Electronic Spray with its excellent creep characteristic ensures displacement of moisture from electrical cables, connectors and contacts. Forms a micro-thin film and protects electrical connectors against moisture. Cleans contacts, removes contamination and dissolves encrusted layers. Acts as a preserver and prevents electrical creep. Reduces voltage drop. Ensures electrical connections are functionally secure. Reduces wear and disperses moisture. Does not harm paintwork, plastic or rubber parts. For maintenance and care of electrical equipment and components, such as push or snap connectors, lamps, fuses, distributor caps, circuit breakers, switches, battery terminals, alternators, starter motors, etc. Also suitable for the lubrication of precision engineered parts such as door mechanisms, car-jacks, slide-ways and Bowden cables.

Area of application

For maintenance and care of various electronic equipment, devices and even fine mechanical components.

Application

Spray the product evenly onto the parts being treated from a distance of approx. 30 cm and allow it to penetrate. If necessary, remove dissolved contaminants and treat the surface again.

Consumption

Depending on the application

Technical data

Physical state: aerosol

Colour: clear/colourless

Odour: characteristic

Melting point: ca. - 190 °C

Initial boiling point and boiling range: ca. - 42 °C


Flashpoint: < 0 °C

Lower explosion limit: 1,5 Vol.-%

Upper explosion limit: 9,4 Vol.-%

Ignition temperature: ca. 400 °C

Available sizes	Item no.	PU
400ml	P2901	12

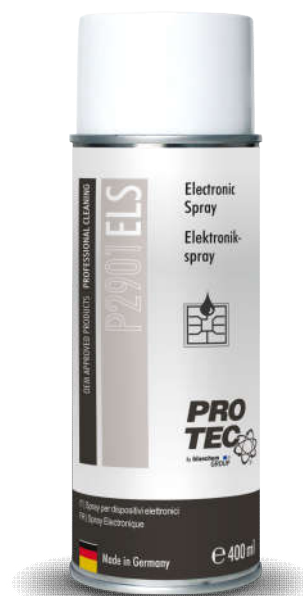

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany

CTP GmbH
Saalfelder Straße 35 h

07338 Leutenberg
Germany

Tel.: +49 (0)36734 230-0
Fax: +49 (0)36734 230-22

www.bluechemgroup.com
www.ctp.de

06.02.2018