

LPG System Clean & Protect (LPG-SCP)

LPG System Clean & Protect

Product properties

This high-performance product has especially been developed for liquefied petroleum gas (LPG) powered vehicles. The product considerably reduces wear and tear, ensures optimal protection against "valve impact", absorbs harmful moisture, reduces thermal load peaks and protects the entire gas system against corrosion. The product reliably prevents formation of combustion residues and protects against oxidation of the liquefied petroleum gas caused by aging.

Area of application

Application to the fuel tank of bivalent vehicles (gas/petrol powered).

Application

Add regularly every 3 to 4 months or every 10,000 km to the fuel system prior to filling up. Please proceed as follows: when the gas tank is almost empty, screw the adapter firmly onto the filling orifice. Afterwards connect the adapter with the valve of the can and turn the can upside-down. Keep the button at the can pressed down for approx. 35 to 40 seconds until the contents of the can is completely emptied. Finally, remove the adapter from the tank orifice and proceed with regular filling up. Optimal results will be achieved when the product "Petrol System Cleaner LPG" is used in combination.

Consumption

120 ml sufficient for up to 50 litres fuel

Reaction time

works during running

Technical data

Physical state: aerosol

Colour: clear/colourless


Odour: characteristic

Flashpoint: < 21 °C

Ignition temperature: 400 °C

Water resistant

Available size	Item no.	PU
120ml	P1931	24

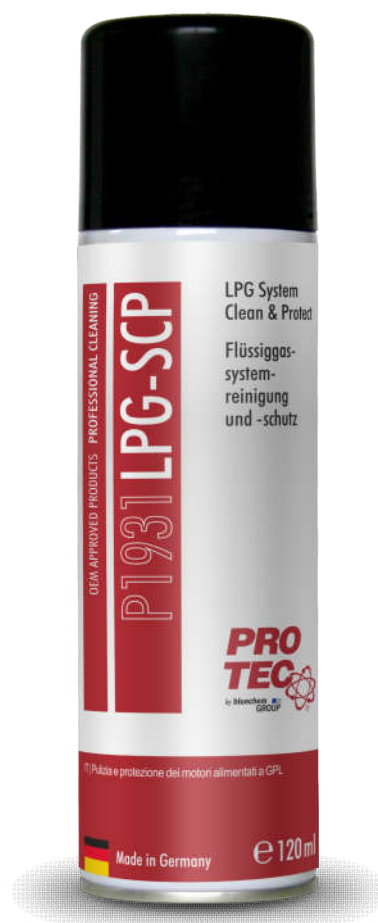

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advice. No liability for printing errors, technical modifications and errors excepted.



Made in Germany

CTP GmbH
Saalfelder Straße 35 h

07338 Leutenberg
Germany

Tel.: +49 (0)36734 230-0
Fax: +49 (0)36734 230-22

www.bluechemgroup.com
www.ctp.de

13.10.2016