

Engine Oil Stop Leak

Product properties

The combination of highly efficient and innovative components regenerates plastic and rubber seals in the oil circuit and keeps it soft. The oil loss through seals or piston rings is reduced or stopped, which reduces the oil consumption. In addition, abrasion and wear will be considerably reduced, the viscosity of the oil is kept stable and works against the oxidation of the engine oil. The usable lifetime of the engine will be extended.

Area of application

For use in all 4-stroke- and diesel engines, transmissions, differentials, etc. This product is compatible with all commercially available oils.

Application

Add to oil system. We recommend an oil system cleaning with Engine Flush before using this product. Total Oil capacity according to manufacturer specifications must be observed.

Consumption

375ml sufficient for 5 liters of oil. Mixing ratio: 1:15

Reaction time

while engine is running

Technical data

Physical state: viscous

Colour: brown


Odour: mild

Flashpoint: > 100 °C

Density at 68 °F: 0.89 - 0.92 g/cm³

Water resistant

Available sizes	Item no.	PU
375ml	P2121	28

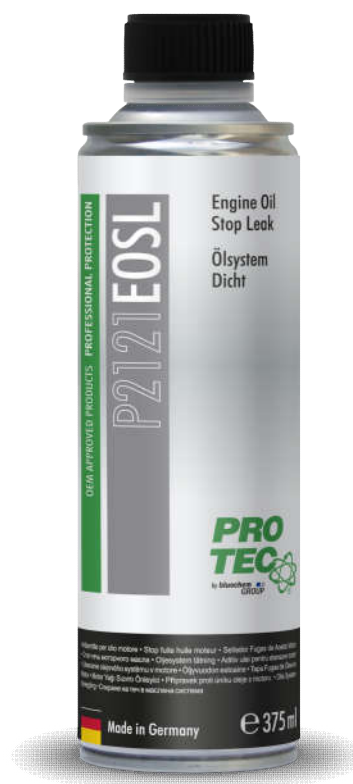

Our information is based on careful examination and may be considered as reliable. However, all information supplied is non-binding advise. No liability for any printing errors. Technical modifications and errors are exempted.



Made in Germany

CTP GmbH
Saalfelder Straße 35 h

07338 Leutenberg
Germany

Tel.: +49 (0)36734 230-0
Fax: +49 (0)36734 230-22

www.bluechemgroup.com
www.ctp.de

26.09.2019